

## " AIR CONDITIONING

SI 2052 | MAINTENANCE KIT WITH CENTRIFUGAL PUMP  
for applications up to 20 kW

Ref :

[>Download PDF](#)

[>Recommend this page to a friend](#)

[>Print](#)



[> Download picture](#)

### APPLICATIONS

Ducted units

Ceiling suspended

Cassette or multi cassette systems

### DESCRIPTION

**Centrifugal pump** identical to those supplied as standard in cassettes and ceiling mounted units. As a maintenance kit, it comes supplied with: – A metal bracket with “universal” mounting holes that fit all major brands currently available on the market – A 85 cm cable with connector and single level alarm detection unit.

### BENEFITS

- ***Silent***
- ***Small size***
- ***Removable connector for easy installation***
- ***Compatible with market standards***

### TECHNICAL DETAILS

Max flow rate 70 l/h

Max suction head

Max discharge head 95 cm

Electric power 14 W

Electric voltage 230 V~ 50/60 Hz  
 Alarm contact 18 mm  
 Detection levels in mm  
 Sound level at 3.3ft < 30 dBA  
 Protection IP X4  
 Detection  
 Thermal protection (overheating) impedance protected  
 Condensate temperature and acidity  
 Timer (operating range)  
 Programmable daily clock  
 Safety standards CE  
RoHS and WEEE directives complies  
 Master pack quantity 25 pieces

**DIMENSIONS(mm) Length Width Height Tank**

Pump unit	88	75	94
Detection unit			—
Cover			—
Box			—


Kit contents :

***KS2052 /Power cable: 85 cm with waterproof connector/ Single level detection unit: DET01550.***

[> More](#)

**SOUND LEVEL\***

\*Measured on the pump operating alone with water in accordance with EN ISO 3744 standard by the LNE (French National Metrology and Test Laboratory), an officially approved and certified body.

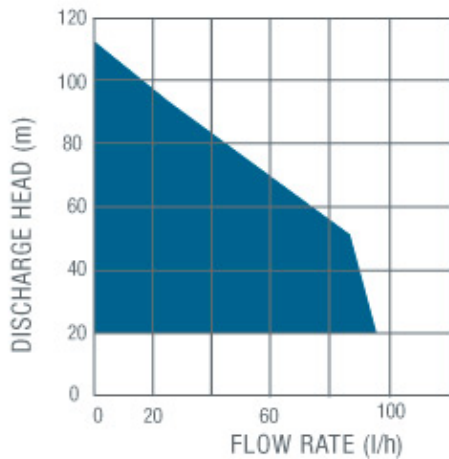

[> flow rate table](#)

[>> Back to list](#)

[>> Selection tool](#)